

# MINI LED EMERGENCY LIGHT | ADJUSTABLE LAMP HEADS

Code: EL-CX



The EL-CX series combines traditional emergency lighting and energy efficiency LED performance for a maintenance-free, with a new modern mini design.



## FEATURES

- UL 924, NEC, OSHA and NFPA 101 Life Safety Code
- Listed for indoor damp location
- Two fully adjustable LED Lamp Heads
- LED indicator light with push-to-test switch
- Lightweight, injection molded, 94V-0 flame retardant thermoplastic housing
- 120-277 VAC operation
- Universal mounting plate
- Innovative, easy installation in minutes

## WARRANTY INFORMATION

Any component that fails due to manufacturer's defect is guaranteed for 1 year. The warranty only covers products installed and maintained in accordance with the instructions provided by their respective manufacturer and no warranty is made with respect to any of our products that are otherwise installed or maintained. For full warranty details, visit our [Warranty Section](#).

## Conformance to Codes and Standards

The EL-CX series is UL listed and meets or exceeds the following: UL 924, NEC, OSHA and NFPA 101 Life Safety Code requirements.

## ORDERING INFORMATION

Series	Housing Color	Operation Type
EL-CX	W (White)	BB (Battery Backup)

## CONSTRUCTION

The EL-CX series is constructed from injection-molded, engineer-grade, 94V-0 flame retardant thermoplastic. White housing is standard.

## ILLUMINATION

The EL-CX features two fully adjustable 1W ultra bright LED lamps providing 144LMs.

## ELECTRICAL COMPONENTS

Dual voltage input 120/277 VAC operation. LED display indicates AC/ON. An external push button test switch allows maintenance personnel to quickly determine the operational status of the unit. Unit offers surge protected, solid state circuitry.

## EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solidstate transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

## BATTERY - BATTERY BACKUP

The EL-CX Emergency Lights series is designed with a maintenance-free 3.6V 1000mAh Ni-Cd battery that provides a minimum emergency duration of 90 minutes. Recharge time of the battery is 24 hours.

## OPERATIONAL TEMPERATURE

### Temperature Ratings


Standard Option

0°C to 40°C / 32°F to 104°F

## INSTALLATION

The EL-CX is suitable for wall or ceiling mount. Snap together design allows for quick and easy installation. Conduit mount knockout on back plate only.

## DIMENSIONS

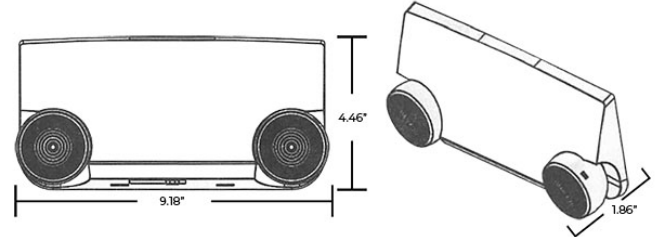

Weight : 2.00 lb

---

3170 Scott St, Vista, CA 92081  
Phone: 877-352-3948 | Fax: 877-352-3949  
info@exitlightco.com