



EMERGENCY LIGHT – DECORATIVE – INDOOR AND OUTDOOR - COLD WEATHER OPTIONS - 3 COLOR OPTIONS

Code: EL-XD



Contemporary, low-profile architectural emergency egress light. Durable die-cast aluminum housing provides both an attractive and dependable egress lighting that compliments any exterior design. Also a great choice for cold, damp, or wet environments.

FEATURES

- UL924, NFPA70, NFPA101, NEC700.16 and OSHA
- Listed for damp or wet location
- Die cast aluminum housing
- UV Stable polycarbonate lens and mirrored reflector
- UL94-5VA Flame rating on polycarbonate
- 6000k Color Temperature
- Universal transformer for 120 or 277 VAC operation (60 Hz)
- Wall or ceiling mount with quick connect mount
- Optional cold weather package: -22°F to 122°F
- Maintenance-free battery
- Low voltage disconnect (LVD)
- Charge rate / power on indicator

WARRANTY INFORMATION

Any component that fails due to manufacturer's defect is guaranteed for 1 year. The warranty only covers products installed and maintained in accordance with the instructions provided by their respective manufacturer and no warranty is made with respect to any of our products that are otherwise installed or maintained. For full warranty details, visit our Warranty Section.



ORDERING INFORMATION

Series	Housing Color	Options
EL-XD	DB (Dark Bronze)	CW (Expanded Temperature)
	W (White)	
	B (Black)	

CONSTRUCTION

The EL-XD light is constructed from premium die cast aluminum components and is available in three colors (Bronze, Black, and White).

ILLUMINATION

The EL-XD Light series is designed with super bright 12W COB LEDs. 1000lm output in Normal Light Mode and 190lm output in Emergency Light mode.

ELECTRICAL COMPONENTS

120/277VAC dual primary 60Hz operation. Standard unit includes G2 self test/diagnostics. Offers field-selectable wiring that allows for AC operation of unit to be controlled using a wall-switch, photocell, or other switching mechanism (switch mechanism not included).

BATTERY - BATTERY BACKUP

The EL-XD Light offers a long life maintenance-free 4.8V NiCad battery. Internal solid-state transfer switch automatically connects to internal battery to LED board for a minimum 90 minute emergency operation.


OPERATIONAL TEMPERATURE

Temperature Ratings	
Series	Temperature
Standard Option	32°F to 104°F
Expanded Temperature Rating	-22°F to 122°F

INSTALLATION

The EL-XD Light has a universal knockout pattern located on the back of the plate for easy wall mounting. Also has a threaded opening at the top for conduit mounting.

DIMENSIONS

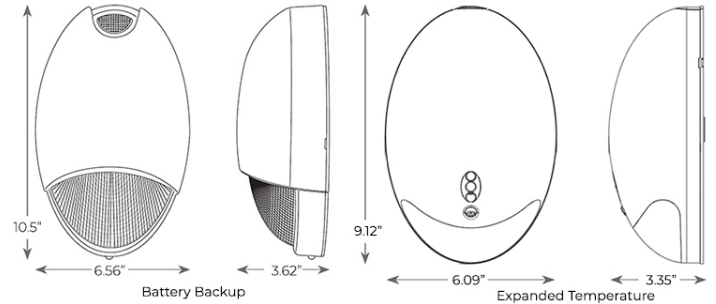

Weight : 6.00 lb

3170 Scott St, Vista, CA 92081
Phone: 877-352-3948 | Fax: 877-352-3949
info@exitlightco.com